

One-touch ease-of-use wireless audio set that utilizes a digital transmission to seamlessly link audio sources. This elegant solution allows you to play guitar wirelessly and still use a pedalboard, all while maintaining a reliable connection.

### **FEATURES**

- One touch ease-of-use
- 2.4 GHz digital transmission for worldwide operation
- 75 m range (250 ft) in optimal conditions
- Up to 5 hours battery life on a single charge
- Switch between multiple transmitters linked to one receiver
- Mix and match different connector types
- Mute from either transmitter or receiver

### **DELIVERY INCLUDES**

- XSW-D 6.3 mm (1/4") transmitter
- XSW-D Pedalboard receiver
- Power supply for receiver
- Extension cable 6.3 mm (1/4")
- Belt clip
- USB-A to USB-C charging cable
- USB-C to USB-C charging cable
- Colored stickers for labelling
- Quick guide
- · Safety guide

#### SPECIFICATIONS

USB C interface (TX 63 Instrument Transmitter)			
Input voltage	typ. 5.0 V		
Charging temperature	0 °C - 60 °C (32 °F - 140 °F)		
Charging time	typ. 3 h		
Battery pack (TX 63 Instrument Transmitter)			
Cell type	Li-lon		
Nominal voltage	3.7 V		
Cell capacity	850 mAh		
Operating time	up to 5 h		
USB C interface (RX Pedal Pedalboard Receiver)			
Output voltage	5 V		
Quitaut aurrant	turn 200 mm A		

Output voltage	5 V
Output current	typ. 380 mA
Input voltage	5 V
Current consumption	max. 185 mA

### External power supply interface (RX Pedal Pedalboard Receiver)

(,		
Input voltage	9 - 15 V, typ. 12 V	
Current consumption	max. 500 mA @ 9 V	

### **AF characteristics**

Codec	aptX® Live
Audio frequency response	3.5 mm Jack/XLR: 80 - 18,000 Hz 6.3 mm Jack: 10 - 18,000 Hz
Audio output	max. 12 dBu
Signal-to-noise ratio	≥ 106 dB
THD	< 0.1 %
Audio latency	< 4 ms

## **Product properties**

approx. 102 x 24 x 28 mm approx. 86 x 24 x 28 mm approx. 122 x 24 x 28 mm approx. 109 x 24 x 28 mm approx. 86 x 24 x 28 mm approx. 122 x 24 x 28 mm approx. 130 x 82 x 51 mm
approx. 86 g approx. 73 g approx. 77 g approx. 90 g approx. 73 g approx. 77 g approx. 890 g
2,400 - 2,483.5MHz
max. 10 mW
GFSK with TDMA

### **Environmental conditions**

Operating temperature	-10 °C to +55 °C (14 °F to 131 °F)
Relative humidity	95 % (non-condensing)

#### **PRODUCT VARIANTS**

### ACCESSORIES

XSW-D PEDALBOARD SET 6.3mm (1/4") transmitter, pedalboard receiver	Art. no. 508486	XSW-D XLR FEMALE TX Transmitter with female XI XSW-D MINI JACK TX Transmitter with 3.5mm (1)
Other sets:		XSW-D INSTRUMENT TX
XSW-D VOCAL SET	Art. no. 508484	Transmitter with 6.3mm (1,
XS 1 handheld, female XLR transmitter, male XLR receiver		XSW-D XLR MALE RX Receiver with male XLR ou
XSW-D LAVALIER SET ME2-II, 3.5mm (1/8") transmitter, male XLR receiver	Art. no. 508485	XSW-D INSTRUMENT RX Receiver with 6.3mm (1/4"
XSW-D PORTABLE LAVALIER SET ME2-II, 3.5mm (1/8") transmitter & 3.5mm (1/8") receiver	Art. no. 508488	XSW-D PEDALBOARD RX Receiver with 6.3mm (1/4" XLR outputs
XSW-D PORTABLE INTERVIEW SET	Art. no. 508489	XSW-D MINI JACK RX Receiver with 3.5mm (1/8"
Female XLR transmitter, 3.5mm (1/8") receiver		NT XSW-D PEDALBOARD Power supply for pedalboa
XSW-D PORTABLE ENG SET ME2-II, 3.5mm (1/8") transmitter, female XLR transmitter, 3.5mm (1/8")	Art. no. 508490	CL 35 3.5mm (1/8") coiled output
receiver		CI 63
XSW-D XLR BASE SET Female XLR transmitter, male XLR receiver	Art. no. 508491	6.3mm (1/4") extension inp XSW-D BELTPACK CLIP Transmitter belt clip
XSW-D PRESENTATION BASE SET 3.5mm (1/8") transmitter, male XLR receiver	Art. no. 508492	XSW-D HOTSHOE MOUNT Camera mount for XSW-D
XSW-D INSTRUMENT BASE SET 6.3mm (1/4") transmitter, 6.3mm (1/4") receiver	Art. no. 508493	
XSW-D PORTABLE BASE SET 3.5mm (1/8") transmitter, 3.5mm (1/8")	Art. no. 508621	


3.5mm (1/8") transmitter, 3.5mm (1/8") receiver

Transmitter with female XLR input	Art. 110. 300434
XSW-D MINI JACK TX Transmitter with 3.5mm (1/8") input	Art. no. 508495
XSW-D INSTRUMENT TX Transmitter with 6.3mm (1/4") input	Art. no. 508496
XSW-D XLR MALE RX Receiver with male XLR output	Art. no. 508497
XSW-D INSTRUMENT RX Receiver with 6.3mm (1/4") output	Art. no. 508498
XSW-D PEDALBOARD RX Receiver with 6.3mm (1/4") & male XLR outputs	Art. no. 508499
XSW-D MINI JACK RX Receiver with 3.5mm (1/8") output	Art. no. 508500
NT XSW-D PEDALBOARD Power supply for pedalboard receiver	Art. no. 508647
CL 35 3.5mm (1/8") coiled output cable	Art. no. 508648
CI 63 6.3mm (1/4") extension input cable	Art. no. 508649
XSW-D BELTPACK CLIP Transmitter belt clip	Art. no. 508650
XSW-D HOTSHOE MOUNT Camera mount for XSW-D receivers	Art. no. 508651

Art. no. 508494


#### DIMENSIONS


XSW Digital TX 63

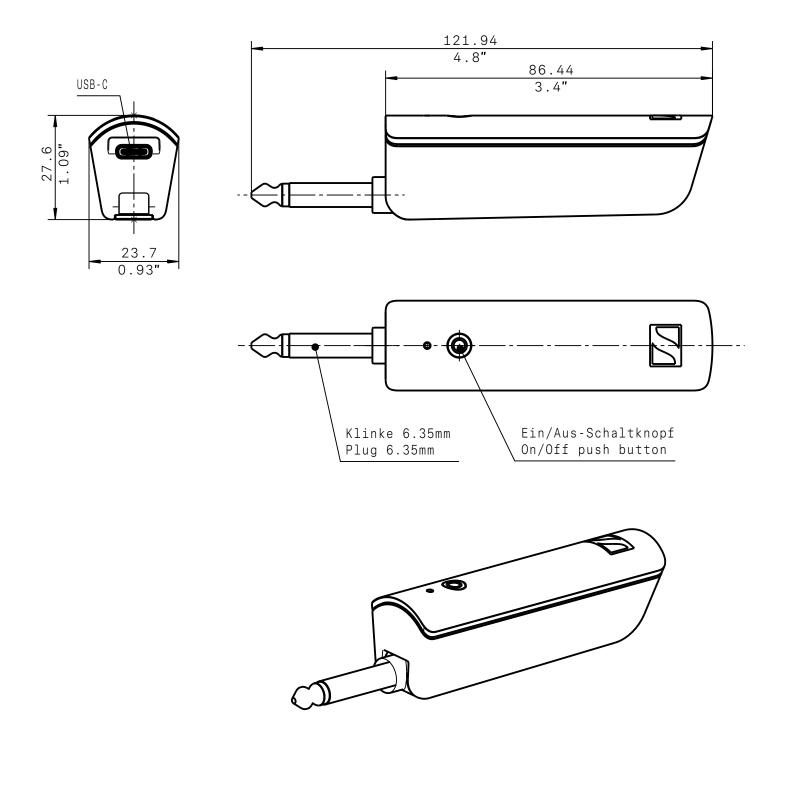



DIMENSIONS


**XSW Digital RX Pedal** 








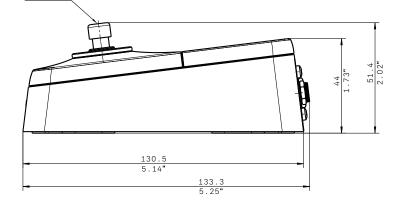



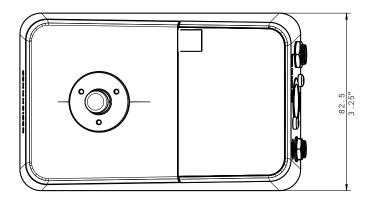

Fusstaster Foot switch