




XLi Series



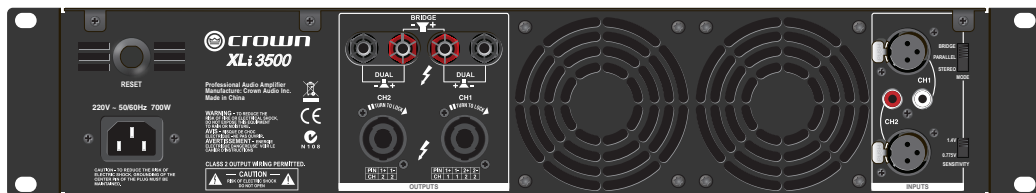

Features

- Stereo/parallel/bridge-mono mode
- User selectable input sensitivity - 0.775V and 1.4V
- RCA and XLR inputs; Speakon® and Binding Post outputs
- Two gain controls, power switch, power LED, and six LEDs which indicate signal presence, clip and fault for each channel
- Protection against shorts, no-load, on/off thumps and radio-frequency interference

Specifications

	XLi800	XLi1500	XLi2500	XLi3500
Channels	2	2	2	2
Sensitivity (for full rated power at 8 ohms)	0.775V or 1.4V	0.775V or 1.4V	0.775V or 1.4V	0.775V or 1.4V
Signal to Noise Ratio (below rated power 20Hz to 20kHz, A-Weighted)	> 100 dB	> 100 dB	> 100 dB	> 100 dB
Total Harmonic Distortion (THD) (20Hz - 20kHz)	< 0.5%	< 0.5%	< 0.5%	< 0.5%
Intermodulation Distortion (60 Hz and 7 kHz at 4:1 from full rated output to -40 dB)	= / < 0.35%	= / < 0.35%	= / < 0.35%	= / < 0.35%
Frequency Response (at 1W, 20 Hz - 20 kHz)	0 dB, -1 dB	0 dB, -1 dB	0 dB, -1 dB	0 dB, -1 dB
Crosstalk (below rated power)	at 1 kHz: -75 dB at 20 kHz: -59 dB	at 1 kHz: -75 dB at 20 kHz: -59 dB	at 1 kHz: -75 dB at 20 kHz: -59 dB	at 1 kHz: -75 dB at 20 kHz: -59 dB
Damping Factor (from 10Hz to 400Hz, 8 ohms load)	> 200	> 200	> 200	> 200
AC Line Voltage and Frequency Configurations (± 10%)	120VAC 60Hz 220VAC 50/60Hz 230-240VAC 50/60Hz	120VAC 60Hz 220VAC 50/60Hz 230-240VAC 50/60Hz	120VAC 60Hz 220VAC 50/60Hz 230-240VAC 50/60Hz	120VAC 60Hz 220VAC 50/60Hz 230-240VAC 50/60Hz

General

Dimension (H x W x D)	3.5" x 19" x 12.4" (89 x 482 x 315mm)	3.5" x 19" x 12.4" (89 x 482 x 315mm)	3.5" x 19" x 12.4" (89 x 482 x 315mm)	3.5" x 19" x 14.4" (89 x 482 x 366mm)
Net Weight	25.1 lb (11.4 kg)	28.0 lb (12.7 kg)	29.7 lb (13.5 kg)	43.0 lb (19.5 kg)
Net Shipping Weight	29.5 lb (13.4 kg)	32.4 lb (14.7 kg)	34.2 lb (15.5 kg)	47.4 lb (21.5 kg)

XLi800

1 kHz Power
4-ohm Stereo (per channel) **300W**
8-ohm Stereo (per channel) **200W**
8-ohm Bridge-Mono **600W**

1 kHz Power: refers to guaranteed minimum power in watts at 1 kHz with 0.5% THD.

XLi1500

1 kHz Power
4-ohm Stereo (per channel) **450W**
8-ohm Stereo (per channel) **330W**
8-ohm Bridge-Mono **900W**

1 kHz Power: refers to guaranteed minimum power in watts at 1 kHz with 0.5% THD.

XLi2500

1 kHz Power
4-ohm Stereo (per channel) **750W**
8-ohm Stereo (per channel) **500W**
8-ohm Bridge-Mono **1500W**

1 kHz Power: refers to guaranteed minimum power in watts at 1 kHz with 0.5% THD.

XLi3500

1 kHz Power
4-ohm Stereo (per channel) **1350W**
8-ohm Stereo (per channel) **1000W**
8-ohm Bridge-Mono **2700W**

1 kHz Power: refers to guaranteed minimum power in watts at 1 kHz with 0.5% THD.

Crown's One-Year Limited Warranty

This Crown Warranty is in effect only for failure of a new Crown product which occurred within the Warranty Period. It does not cover any product which has been damaged because of any intentional misuse, accident, negligence, or loss which is covered under any of your insurance contracts. This Crown Warranty also does not extend to the new Crown product if the serial number has been defaced, altered, or removed. See your authorized Crown dealer for full warranty disclosure and details. For customers outside of the USA, please contact your authorized Crown distributor for warranty information or call 574-294-8200.



Specifications subject to change without prior notice. Latest information available at www.crownaudio.com.

Crown, Crown Audio, Com-Tech, IQ System, BCA and Multi-Mode are registered trademarks and PIP2 is a trademark of Crown International. HiQnet is a trademark of Harman International Industries, Inc. Other trademarks are the property of their respective owners.

© 2012 Harman International.

Printed in China